



Submittal Data Sheet

2.5-Ton Multi Position Air Handling Unit (w/ disconnect)

FXTQ30TAVJUD

FEATURES

- Capable of upflow, horizontal-right, horizontal-left, and downflow installation. Downflow installation requires the use of a field installed downflow accessory kit.
- Variable speed ECM motor produces nominal CFM up to 0.9" external static pressure.
- Improved auxiliary heat logic
- Designed with less than 2% air leakage when tested in accordance with ASHRAE 193.
- All-aluminum coil
- Precise refrigerant modulation from a 2000 pulse electronic expansion valve
- Cool, Dry, Auto, Heat, and Fan operation modes
- Auto Fan Speed automatically adjusts fan speed in relation to space temperature and set point
- Factory mounted disconnect switch
- Configurable Dry mode
- Standard Limited Warranty: 10-year warranty on compressor and all parts

BENEFITS

- Optimized fan speed from Auto Fan Speed logic
- Reduced auxiliary heat dead band
- Configurable electric heat on/off temperature settings
- Compact foot print fits tight spaces





Submittal Data Sheet

2.5-Ton Multi Position Air Handling Unit (w/ disconnect)

FXTQ30TAVJUD

PERFORMANCE

Indoor Unit Model No.	FXTQ30TAVJUD	Indoor Unit Name:	2.5-Ton Multi Position Air Handling Unit (w/ disconnect)
Type:	Ducted	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Rated Cooling Capacity (Btu/hr):	30,000	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 70 Ambient (°F DB/WB): 47 / 43
Sensible Capacity (Btu/hr):	21,400	Rated Piping Length(ft):	
Cooling Input Power (kW):	0.410	Rated Height Separation (ft):	
Rated Heating Capacity (Btu/hr):	34,000		
Heating Input Power (kW):	0.41		

INDOOR UNIT DETAILS


Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Airflow Rate (H/M/L) (CFM):	1,000/850/700
Power Supply Connections:	L1, L2, Ground	Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):	4.90	Gas Pipe Connection (inch):	5/8
Max Overcurrent Protection (MOP) (A):	15.00	Liquid Pipe Connection (inch):	3/8
Dimensions (HxWxD) (in):	45 x 17.5 x 21	Condensate Connection (inch):	3/4
Panel (HxWxD) (in):		Sound Pressure (H/SL) (dBA):	52/60
Net Weight (lb):	115	Sound Power Level (dBA):	
Panel Weight (lb):		Ext. Static Pressure (Rated/Max) (inWg):	0.90 / 0.90

Submittal Data Sheet

2.5-Ton Multi Position Air Handling Unit (w/ disconnect)

FXTQ30TAVJUD

DIMENSIONAL DRAWING

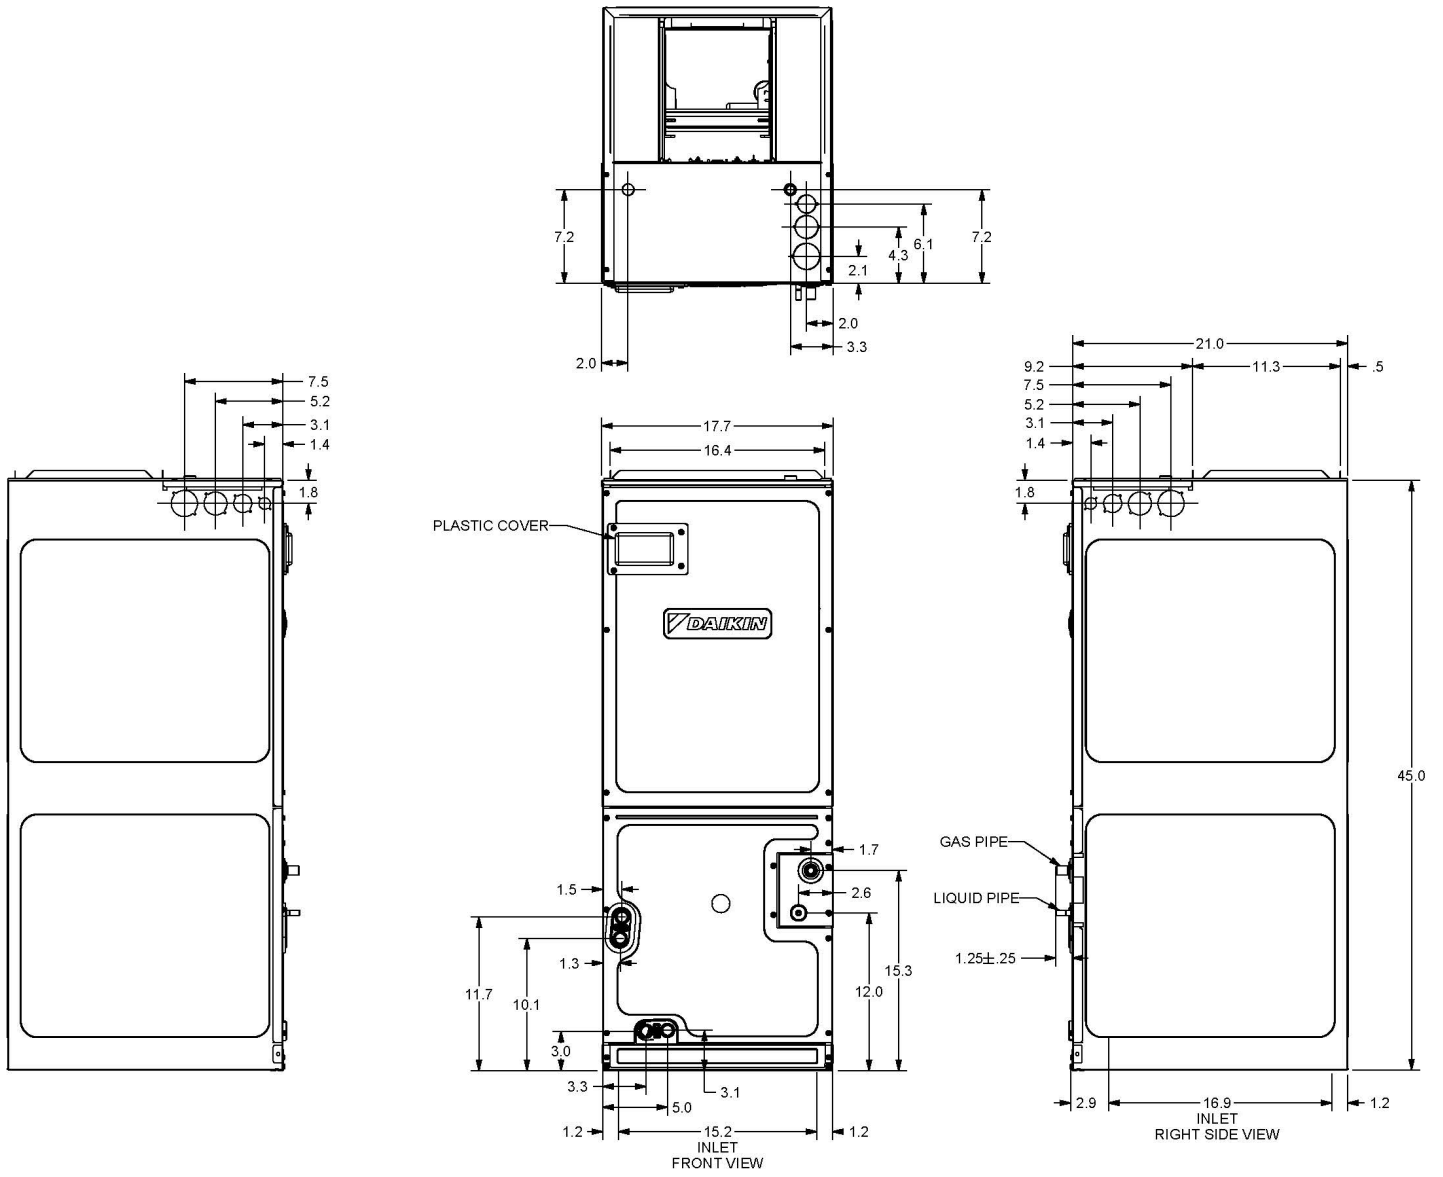

FXTQ09/12/18/24/30/36 TAVJU