

Say hello to the Daikin *ONE* touch smart thermostat.

The Daikin *ONE* touch smart thermostat is the newest addition to the Daikin *ONE* ecosystem line of products, joining the Daikin *ONE+* smart thermostat as a control solution for Daikin's communicating unitary equipment, including Daikin *FIT*.

With customizable settings and the power to wirelessly control heating and cooling from anywhere, homeowners may never want to change their thermostat manually again. However, the touchscreen interface supports a user-friendly experience when they do. Additionally, voice control is possible with compatible Amazon and Google devices. Plus, every Daikin *ONE* touch includes one year of *SkyportCare* cloud services at no added cost, allowing contractors to support their customers' systems remotely and offer homeowners additional peace of mind!

Features:


- » Simple, elegant industrial design
- » Capacitive touchscreen user interface
- » Wi-Fi-enabled smart thermostat with iOS and Android app control
- » Voice control by Amazon Alexa and Google Assistant
- » Control and comfort functions: Away mode, geo-fencing
- » Outdoor environment monitoring: outdoor temperature, outdoor humidity, and weather forecast
- » Compatible with Daikin *ONE* home air monitor for IAQ visualization
- » Error and service notifications
- » Multi-language support: English, Spanish, and French
- » Programmable 4-event schedule with adjustable hold function
- » Compatible with *SkyportCare* and *SkyportHome* app



First year of *SkyportCare* included with purchase.
Ask your Daikin contractor for more information!




The **home screen** displays the current temperature, the system mode, a set-point adjustment slider, and icons leading to the other top-level screens.



The **schedule screen** displays upcoming set-point changes and their scheduled times, and access to edit mode for changing the schedule events.



The **away screen** displays energy saving set-points. Away mode can be selected manually or entered automatically using geo-fencing in the *SkyportHome* app.



The **air quality screen*** displays indoor air quality levels when a Daikin *ONE* home air monitor is connected. Outdoor air quality and weather will be displayed when the thermostat is connected to the internet and added to the mobile app.

*Actual screen may vary for different indoor unit models. The Daikin *ONE* home air monitor only works with ducted units.

Additional Features

- » Over-the-air software update capable (requires Wi-Fi connection)
- » 1 Auxiliary output (dry contact), configurable as a humidifier, dehumidifier, or primary or secondary heat source
- » Open API compatible for home control systems such as Control4 and Crestron
- » Title 24 compliant
- » This model (DTST-TOU-A) is a base version for use with Daikin unitary systems.

R-32 Unitary Split Systems	Type	Compatible Family (Models starting with)
	Outdoor Unit	DC_VS, DC7TC, DH_VS, DH_TC
	Air Handling Unit	D_VE, A_VE
	Coil	CAPE, CHPE
	Modular Blower	MBVK
	Gas Furnace	DR_MC, DR_SC, DD_SC, DD_MC, DR_TC, DD_TC

Indoor Air Quality	Daikin <i>ONE</i> Home Air Monitor (Only compatible with ducted units)
--------------------	--

Ductless Mini & Multi-Split Systems	Type	Compatible Family (Models starting with)
	R-32 12RC Indoor Units	CMXV
	R-410A S21 Indoor Units ¹	CDXS, CTXS ² , FDXS, FTK ³ , FTXB ³ , FTXF ³ , FTXG ³ , FTXO9_12N ³ , FTX15_18_24N ³ , FTXR, FTXS, FVXS ³
	R-410A P1/P2 Indoor Units ¹	CDMQ, FDMQ, FFQ

¹ Must purchase and install communication adaptor DAPT-ONE-VMS

² Must purchase S21 adaptor KRP067A41E

³ Must purchase S21 adaptor KRP980B2E

⁴ The Sarara drying function of the *QUATERNITY* units is not supported with Daikin *ONE+* smart thermostat, but the dehumidification function of the Daikin *ONE+* can be used with the *QUATERNITY* indoor units.

SkyAir and VRF Systems ⁴	Type	Compatible Family (Models starting with)
	R-410A VRF Indoor Units	FXAQ, FXDQ, FXFQ, FXLQ, FXMQ, FXNQ, FXSQ, FXZQ
	R-410A SkyAir Indoor Units	FAQ, FBQ, FCQ, FHQ, FTQ

⁴ Must purchase and install communication adaptor DAPT-ONE-VMS

DAIKIN *ONE* TOUCH SMART THERMOSTAT SPECIFICATIONS:

Model Number	DTST-TOU-A
Description	Daikin <i>ONE</i> touch smart thermostat
Dimensions	0.86"L x 3.4"W x 4.74"H
Weight	6.5 oz
Operation Temperature	32°F to 120°F
Thermostat Compliance	Compliant to California Title 24 (OCST listed), FCC Certified, and UL Listed.



SkyportHome




SkyportCare

ADDITIONAL INFORMATION

Before purchasing this appliance, read important information about its estimated annual energy consumption, yearly operating cost, or energy efficiency rating that is available from your retailer.

Our continuing commitment to quality products may mean a change in specifications without notice.

© 2025 DAIKIN COMFORT TECHNOLOGIES NORTH AMERICA, INC. · Houston, Texas · USA · www.daikincomfort.com

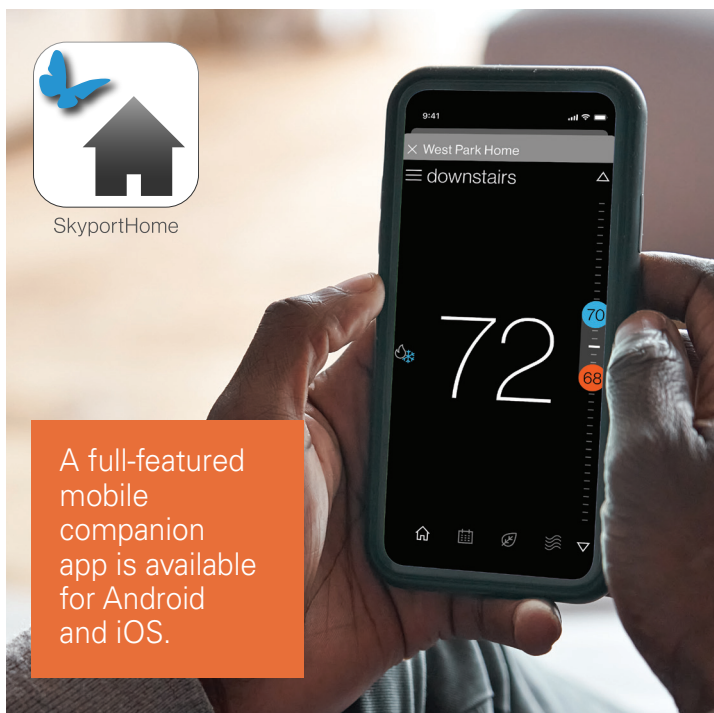

Control is available through popular voice-activated speakers.



TO LEARN MORE ABOUT THE DAIKIN *ONE* TOUCH SMART THERMOSTAT, SCAN CODE OR VISIT:
www.daikincomfort.com



THE DAIKIN *ONE* TOUCH SMART THERMOSTAT IS BACKED BY AN OUTSTANDING 12-YEAR¹ LIMITED WARRANTY*

* Complete warranty available from your local dealer or at www.daikincomfort.com. To receive the 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California, Florida, or Québec. The duration of warranty coverages in Texas and Florida differs in some cases. Other limitations and exclusions apply, refer to complete warranty details for full list of limitations and exclusions.

¹ 12-Year Limited Warranty is available for owner-occupied residences only. For multi-family and/or commercial applications, the warranty period is 5-years.